

Electric pump **EL10 S**

Technical specifications:

Capacity:	60 m ³ /h
Head:	15 m
Voltage/Current:	230-400 V / 33-19 A
Weight:	270 Kg
Cross Section:	ø 25 mm
Impeller:	4 vanes open / ø 300 mm
Bore:	ø 100 mm

Electric motor:

Phases/poles/frequency:	3 / 4 / 50 Hz
Motor Output:	9 kW (12.5 HP)
Speed:	1450 R.P.M.
Motor Insulation:	Class F

Materials:

Main Body: spheroidal cast iron GS500.
 Motor Housing : cast iron G25.


- 1) Impeller - high chrom.
- 2) Wear Plate (adjustable) - high chrom.
- 3) Agitator - high chrom.

Main Shaft : austempering NiCrMo4 Steel.

Seals:

Motor Zone : double mechanical seal silicon carbide - silicon carbide in oil bath.
 Impeller Zone : (alternate) no.2 compact polyurethane seals plus no.2 double rubber lip seals with stainless steel spring.

Performance Curve

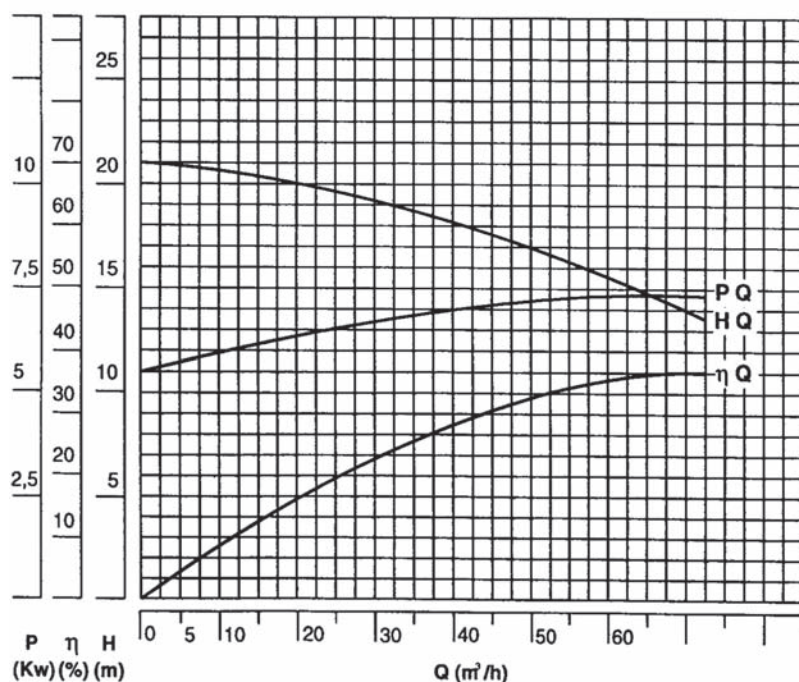

Dimensions

A (mm)	437
d (mm)	25
D (mm)	100
D1 (mm)	435
H (mm)	917
H1 (mm)	200

